


American Ultraviolet

UFA-36-2-IP55

Ultraviolet Germicidal Dual Lamp IP55 Utility Fixture

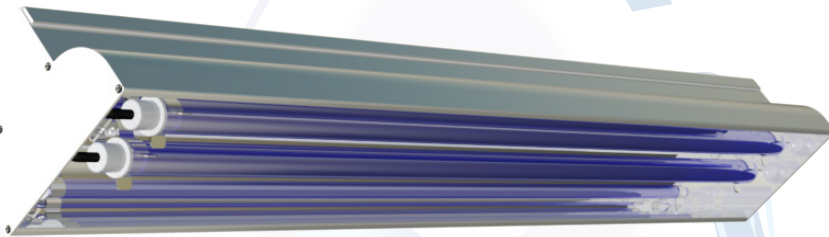

APPLICATION

The UFA-36-2-IP55 Utility Fixture is designed to meet IP55 rating standards, making it dust protected and suitable for washdown environments.

SPECIFICATIONS

Material Construction: Extruded aluminum housing with replaceable, spectrally polished reflector liner for maximal UVC reflectivity.

Lamps: Two (2) standard output (420mA), low-pressure mercury vapor, cell-base, dual-walled UVC lamps with sure seal lamp cable connection to greater degree of moisture protection than a standard lamp type.

Electrical: Input voltage shall be 120-277VAC, 50/60Hz. Liquid tight conduit shall be used to bring power to fixture for all moisture-proof applications.

Mounting: By end user, as required. Optional mounting brackets can be fitted to fixture end-plates

Dimensions: 36.18" L x 5.00" W x 3.81" H



**American
Ultraviolet**

Since 1960. It's all we do.

No matter your UVC need, American Ultraviolet has a solution for you. If one of our standard units doesn't fit your application, we offer full custom engineered solutions as well. We know UV. Since 1960. It's all we do.

For More Information:

www.americanultraviolet.com

(800) 288-9288

UV Germicidal Solutions

